


Empowered by Innovation

**NEC**

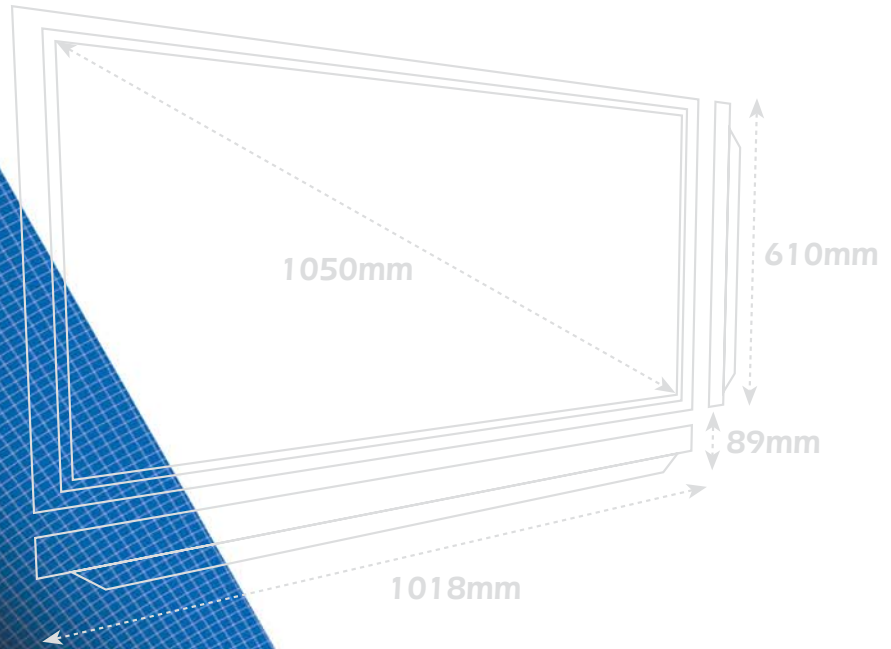


## Specifications

**42XM3**  
42" Wide XGA Multimedia Display



**PlasmaSync™**

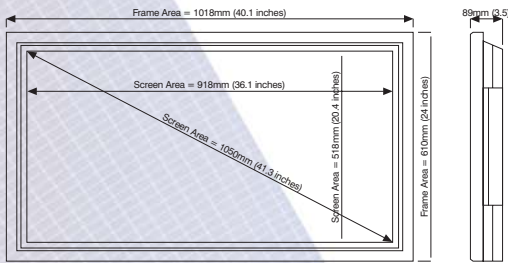

# 42XM3 42" Wide XGA Multimedia Display

The Latest Generation PlasmaSync™ 42XM3 family pushes the industry standards of picture performance to extremes, especially in both public and multimedia display applications.

<b>Product Code</b>	42XM3
<b>Screen Size</b>	918mm (H) x 518 (V) / 36.1" (H) x 20.4" (V) / Diagonal 1050mm, 42"
<b>Aspect ratio</b>	16:9
<b>Resolution</b>	1024 (H) x 768 (V) pixels
<b>Pixel Pitch</b>	0.897mm (H) x 0.675mm (V) / 0.035" (H) x 0.027" (V)
<b>Colour Processing</b>	4,096 steps, 68.7 billion colours
<b>Synchronization Range</b>	Horizontal: 15.5 to 110 kHz (automatic: step scan) Vertical: 50.0 to 120.0Hz (automatic: step scan)
<b>Input Signals</b>	<b>Video:</b> Composite/S; <b>DTV:</b> Y,Pb(Cb),Pr(Cr); <b>RGB;</b> <b>PC</b>
<b>Input terminal RGB</b>	RGB1 Mini D-Sub 15pin x 1 RGB2 BNC (R,G,B,H/CS,V) x 1 RGB3 DVI-D 24pin x 1
<b>Input Terminal Video</b>	Video 1 BNC 1pin (Composite Video input) Video 2 RCA 1pin (Composite Video input) Video 3 S-Video input: DIN 4-pin x 1
<b>Input Terminal HD/DVD/DTV</b>	DVD1 / HD1 = RCA-pin (Y, PB[CB], PR[CR]) x 1 DVD2 / HD2 = BNC (Y, PB[CB], PR[CR]) x 1 DVD 3 / HD3 = DVI-D 24-pin x 1
<b>Input Terminals Audio</b>	Stereo RCA x 3 (selectable)
<b>External Control</b>	D-sub 9-pin x 1 (RS-232C)
<b>Wired Remote Input Terminals</b>	3P plug
<b>Wired Remote Output Terminals</b>	3P plug
<b>Output Terminal Video</b>	BNC x 1 (shared with Video1 input, selectable)
<b>Output Terminal RGB of Y/Pb(Cb)/Pr(Cr)*</b>	Mini D-Sub 15pin (shared with RGB1, selectable)
<b>Audio Output Power for Speaker</b>	8W +8W (at 6 ohm)
<b>Wide Control</b>	Video input / RGB (PC) input
<b>Plug and Play</b>	DDC1, DDC2b
<b>Power Sources</b>	100 to 240 V 50/60HZ
<b>Current Rating</b>	5.2A (Max)
<b>Power Consumption</b>	305W (typical)
<b>Dimensions</b>	1018mm (W) x 610mm (H) x 89mm (D) / 40.1" (W) x 24.0" (H) x 3.5" (D)
<b>Weight</b>	29.5kg / 65.0 lbs
<b>Front Panel User Controls</b>	Power on/off, Input source select, Volume up / down / OSM control
<b>Remote Control Function</b>	Power (ON/STAND BY), Input Source Select (Video, DVD / HD, RGB / PC), Volume (up / down), Mute, Wide, Display, Off timer, Cursor (up, down, left, right), Pointer, Zoom (up / down), Auto Adjust, ID Select, Clear
<b>OSM Function</b>	<b>Picture:</b> (Contrast / Brightness / Sharpness / Color / Tint / Picture Mode / Noise Reduction (NR) / Color temperature / White Balance / Gamma / Low tone / Color Tune); <b>Audio:</b> (Bass / Treble / Balance / Audio Input x 3); <b>Image Adjust:</b> (Aspect Mode / V-Position / H-Position / V-Height / H-Width / AutoPicture / Fine Picture / Picture Adj); <b>Option 1:</b> (OSM / BNC Input / D-Sub Input / RGB Select / HD Select / Input Skip / All Reset); <b>Option 2:</b> (Power Mgt / Cinema Mode / Long Life [PLE, Orbiter, Inverse, White, Screen wiper, Soft Focus] / Grey level / S1/S2 / DVI Set up); <b>Option 3:</b> (Timer / Pwr on Mode / Control Lock / IR Remote / Loop Out / ID Number/ Video Wall); <b>Advanced OSM:</b> (On/Off); <b>Language:</b> (English/Deutsch/Francais/Espanol/Italiano/Svenska/Chinese/Russian); <b>Color System:</b> (Auto / PAL / PAL-M / PAL-N/ PAL60 / SECAM / 4.43NTSC / 3.58NTSC); <b>Source Info</b>
<b>Regulations</b>	IEC60950-1, EN60950-1, EN55022:1998+A1:2000 Class A, EN55024:1998+A1:2001, EN61000-3-2:2000, EN61000-3-3:1995+A1:2001, AS/NZS CISPR22:2002 ClassA
<b>Environmental Operation</b>	Temperature: 0°C to 40°C / 32°F to 104°F Humidity: 20 to 80% (no condensation) Altitude: 0 to 2800m / 0 to 9180 feet
<b>Environmental Storage</b>	Temperature: -10°C to 50°C / 14°F to 122°F Humidity: 10 to 90% (no condensation) Altitude: 0 to 3000m / 0 to 9840 feet
<b>Accessories</b>	Remote control with two AAA batteries, Power cable, User's Manual, Safety metal fittings, Screw for safety metal fittings, Ferrite cores, bands, Cable clamps
<b>Other Features</b>	<b>Motion Compensated 3D Scan Converter:</b> (NTSC, PAL, 480i, 576i, 525i, 625i, 1035i, 1080i); <b>2-3 pull down Converter:</b> (NTSC, 480i, 1035i, 1080i, 60Hz); <b>2-2 pull down Converter:</b> (NTSC, 480i, 525i, PAL, 576i, 625i); <b>Digital Zoom:</b> (100-900% Selectable); <b>Low tone:</b> (3 mode); <b>Color Temperature select</b> (high/mid/low, user has 4 memories); <b>Color Tune;</b> <b>Self Diagnosis:</b> (RS232C commands); <b>Image Burn reduction tools</b> (PLE LOCK1-3, INVERSE, WHITE, ORBITER, (Auto), 2/Manual), SCREEN WIPER, SOFT FOCUS); <b>Control Lock;</b> <b>IR Remote;</b> <b>Auto Picture;</b> <b>Input skip;</b> <b>Auto ID;</b> <b>Programmable Timer;</b> <b>Gamma Correction:</b> (4 modes); <b>Loop through interface;</b> <b>Plug and play</b> (DDC1, DDC2b, RGB3: DDC2b only)

PlasmaSync and OSM are trademarks of NEC Corporation. The plasma display panel consists of fine picture elements (cells). Although NEC produces these plasma display panels with more than 99.99 percent of their cells active, there may be some cells that do not produce light or remain lit after they should have turned off. Light output of a PDP module gradually decreases over long-term use. Do not display static images for prolonged periods; otherwise a phosphor burn may appear on a part of the panel. Phosphor burns are not covered by the warranty. Status September 2004. Specifications may change without notice.

NEC Deutschland GmbH [GERMANY].....Tel: +49 (0) 89 96274 144 Fax: +49 (0) 89 96274525 www.nec.de  
 NEC France S.A [FRANCE].....Tel: +33 (0) 1 46 49 46 49 Fax: +33 (0) 1 47 69 92 86 www.nec.fr  
 NEC Iberica S.A.U [SPAIN].....Tel: +34 91 203 2900 Fax: +34 91 650 1100 www.nec.es  
 NEC Italia s.r.l. [ITALY].....Tel: +39 02 48 41 51 Fax: +39 02 48 40 08 75 www.nec.it  
 NEC Scandinavia AB [SWEDEN].....Tel: +46 (0) 8 635 92 00 Fax: +46 (0) 8 635 93 50 www.nec.se  
 NEC [UK] Ltd.....Tel: +44 (0) 845 234 4040 visualcommunication@uk.necur.com, www.nec.co.uk



**PlasmaSync™**

Empowered by Innovation



PlasmaSync and OSM are trademarks of NEC Corporation.  
 For further information, please contact: [www.plasmasync.com](http://www.plasmasync.com)